



## Description

The SkyHub solution is a hardware and software set designed to enhance commercial-off-the-shelf UAVs capabilities for industrial purposes and to support integration of diverse sensors.

## Applications

- Custom payload integration with drone
- Advanced UAV flight control scenarios
- Using drones in an adverse environment

## Features

- Fully isolated and ESD-protected external interfaces
- Reliable and convenient connectors with lock, ideal for airborne applications
- Selectable power output (9 V / 12 V / 15 V / 18 V) with switch-off function for payload connecting
- Drone power pass-through to external payloads
- 3x UART / 1x RS-232 / 1x UART/RS-232 combined / 2x USB / Ethernet / Wi-Fi / Bluetooth interfaces
- 4x GPIO pin pairs for general purpose input/output
- Protection against input power's inverse polarity
- Extended operating temperature range from  $-25^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$

## Interfaces

The SkyHub 3 device provides a connection to different payloads via several interfaces:

- 3× UART interfaces
- 1× UART / RS-232 interface
- 1× RS-232 interface
- 4× GPIO pin pairs
- Ethernet interface
- Bluetooth interface
- 2× USB 2.0

## Power outputs

SkyHub 3 eliminates the need to have a separate battery or power circuit for the sensors. Every connector with communication ports has pins with +5V and +12V covering 99% of power requirements for the sensors. One additional power connector is configurable and may output 9, 12, 15, 18V with 5A load maximum. Other possibility to power sensors is from a drone power pass-through connector.

## Specifications

### General

CPM version	Compatible drones
4.0.x	<ul style="list-style-type: none"> <li>• DJI M350 RTK</li> <li>• DJI M300 RTK</li> <li>• Custom frames based on DJI A3 flight controller</li> </ul>
3.19.x	<ul style="list-style-type: none"> <li>• Pixhawk with ArduCopter / PX4</li> <li>• DJI M210 / M210 V2</li> <li>• DJI M600 / M600 Pro</li> </ul>
Temperature range	-25°C to +50°C

## General

Power input	12 V to 60 V, SkyHub itself works from 9+ V
Power output	selectable 9 V / 12 V / 15 V / 18 V, up to 5 A

## Computational Core

System-on-Module	Raspberry Pi Compute Module 4
CPU	Cortex-A72 (ARM v8) 64-bit
CPU frequency	up to 1.5 GHz
RAM	8 GB
Flash, eMMC	32 GB
OS	Ubuntu Server 21.04

## Interfaces

UART	up to 4
RS-232	up to 2
GPIO	up to 4
USB	up to 2
Wi-Fi	Dual-band 802.11 b/g/n/ac
Bluetooth	5.0 with BLE support
Ethernet	10/100 Mbit

## Mechanical


Dimensions (L × W × H)	112 × 84 × 34mm
------------------------	-----------------

### Mechanical


Weight	195 g
Weight with mountings	215 g for DJI M300 220 g for DJI M600

### Overview

The main device elements are illustrated below.

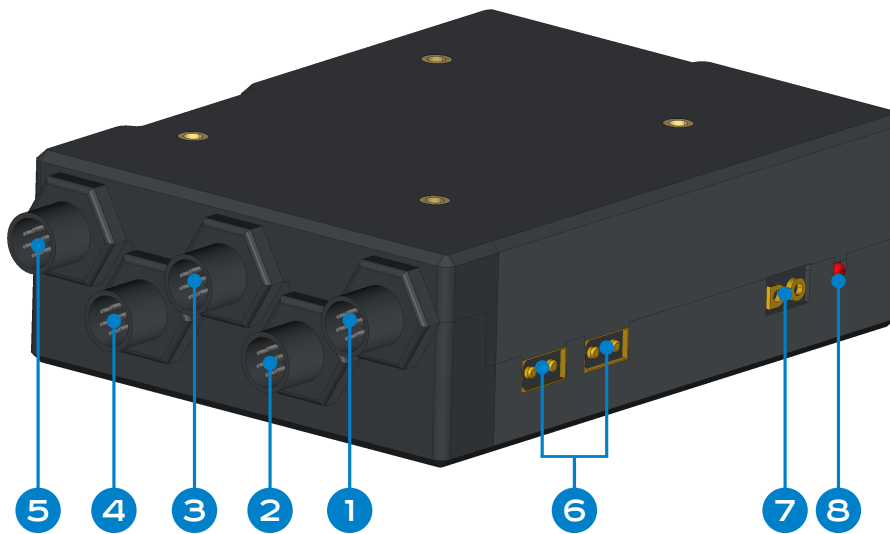

SkyHub 3 overview. Side 1

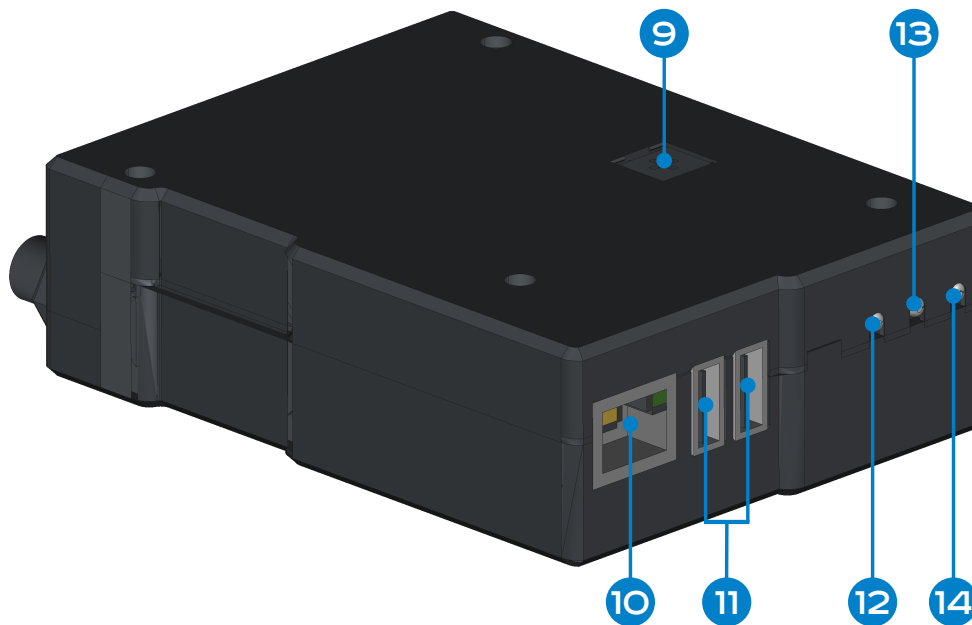

SkyHub 3 overview. Side 2



SkyHub 3 elements outline

- 1 Connector 1**

By default for communicating with the altimeter (see [UART / RS-232 / GPIO](#))
- 2 Connector 2**

By default for communicating with the flight controller (see [UART / RS-232 / GPIO](#))
- 3 Connector 3**

Communicates with UART-based payloads (see [UART / RS-232 / GPIO](#))
- 4 Connector 4**

By default for communicating with any UART-based or RS-232-based sensors (see [UART / RS-232 / GPIO](#))
- 5 Connector 5**

Communicates with RS-232-based payloads (see [UART / RS-232 / GPIO](#))
- 6 Power input**

Power input, two ports to enable drone power pass-through (see [Power Input](#))
- 7 Power output**

Feeds the payload (see [Power Output](#))
- 8 Power output LED (Red)**

Indicates the presence of power output
- 9 Power Output Selector**

Defines power output for payloads (see [Power Output Selector](#))
- 10 Ethernet connector**

Communicates with Ethernet-based payloads (see [Ethernet](#))
- 11 USB ports**

Double USB-port to communicate with USB-based payloads or through USB-UART adapter (see [USB ports](#))
- 12 Payloads LED**

Indicates the connection to payloads (support coming soon)
- 13 Autopilot LED (Green / Red)**

Indicates the connection of an autopilot. Green when autopilot works well. Red when autopilot isn't connected. Turned off when support for autopilot turns off
- 14 Core power LED (Yellow)**

Indicates the presence of core power


## Connectors

### *Power Input*

- Mating connector on the cable side: **Amass XT30U-F**
- Voltage range: **12 V to 60 V**.

- The SkyHub device itself works from 9+ V
- Protected against reverse polarity
- One port to power the SkyHub device, another can be used to enable drone power pass-through to external payloads

*Pinout (device side)*




Pin	Name	Description
1	+V	Power supply voltage
2	GND	Power supply ground



### Power Output

- Mating connector on the cable side: **Amass XT30U-M**
- Voltage: **Nominal  $\pm 1\%$**
- Output nominal voltage defines by [Power Output Selector](#)
- Current: **up to 5 A**

*Pinout (device side)*




Pin	Name	Description
1	+V	Power output voltage
2	GND	Power output ground

### Power Output Selector

- Switcher: **C&K RTE16**
- Available voltages: **9 V, 12 V, 15 V, 18 V**


*Positions*

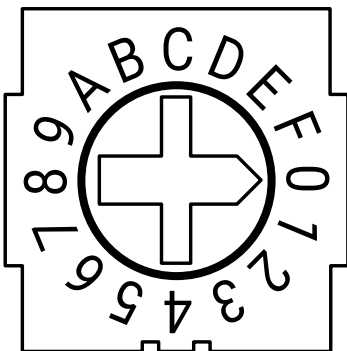

Position	Description
1	18 V output voltage
2	15 V output voltage
4	12 V output voltage
8	9 V output voltage

### UART / RS-232 / GPIO

SkyHub 3 has five identical connectors to be dedicated to communicating with the flight controller, payloads equipped with the UART or RS-232 interface.

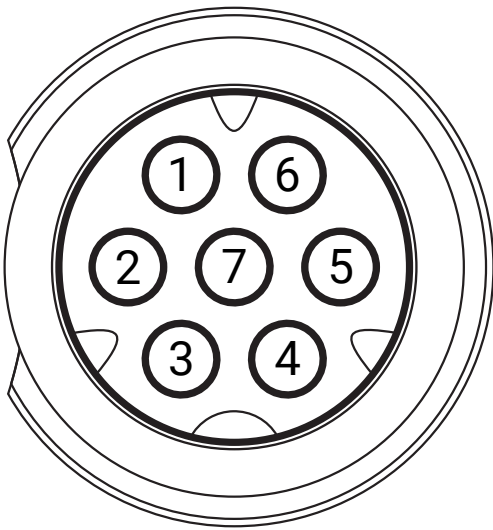

- One of the connectors is the combined UART / RS-232 interface.
- Four connectors provide support for GPIO line. GPIO pin pairs have no fixed reserved usage, depending on the payload they can be used for payload power switching, PPS input/output or other tasks.
- Mating connector on the cable side: **Switchcraft W16982-7SG-P-518**
- Logic level: **3.3 V**
- Isolated from the CPU
- ESD-protected

*Pinout (device side)*

Pin	Connectors				
	1	2	3	4	5
1	GND	GND	GND	GND	GND
2	+5 V	+5 V	+5 V	+5 V	+5 V
3	+12 V	+12 V	+12 V	+12 V	+12 V
4	UART_TX	UART_TX	UART_TX	UART_TX	GPO19
5	UART_RX	UART_RX	UART_RX	UART_RX	GPI6
6	GPO18	GPO7	GPO17	RS232_TX	RS232_TX
7	GPI11	GPI23	GPI27	RS232_RX	RS232_RX

### *Pins description*

Pin name	Description
GND	Ground
+5 V	5 V output voltage up to 1 A
+12 V	12 V output voltage up to 1 A
UART_TX	UART transmit line
UART_RX	UART receive line
RS232_TX	RS-232 transmit line
RS232_RX	RS-232 receive line
GPO	GPIO output line
GPI	GPIO input line

### *Serial device paths*

Connector number	Serial device paths
Connector 1	/dev/ttyAMA1
Connector 2	/dev/ttyS0
Connector 3	/dev/ttyAMA2
Connector 4	/dev/ttyAMA3
Connector 5	/dev/ttyAMA4

### ***USB ports***

Double USB-port to communicate with USB-based payloads or through USB-UART adapter. Where possible, UART has to be used instead of USB to avoid the time lag introduced by USB communications overhead.

- Mating connector on the cable side: **USB A**
- Total current: **up to 3 A**

### ***Ethernet***

Dedicated to communicating with the payload equipped with the Ethernet interface.

- Mating connector on the cable side: **RJ-45**
- Bitrate: **10/100 Mbit**